

BGX-4900 SERIES


















ADVANCED FILTRATION TECHNOLOGY


The Aquamor Foodservice line of filters contains a variety of substrates acting as scale inhibitors; greatly reducing the mineral deposits in treated water and providing an exponentially cleaner drinking experience. Our high-quality blocks provide tremendous capacity to reduce impurities such as chlorine taste and odor as well as sand, silt, sediment, and rust which may be present in your drinking water. Our patented scale inhibitor media reduces the accumulation of minerals that lead to hard water deposits from lime and scale build-up on equipment. These processes ensure that you are getting the cleanest and best tasting water possible. The Foodservice line provides superior protection for your office coffee and Insta-hot appliances, reducing downtime and unnecessary maintenance, and extending the life of your appliances. Aquamor Foodservice filters are economical and will provide you superior protection in any beverage or food equipment application.

FILTER FEATURES

- Made in the USA
- NSF Certified
- Economical alternative to expensive filter substitutes
- Delivers clean and clear water that looks and taste great
- Scale-reducing models significantly reduce build-up due to minerals present in the water supply
- Designed to provide lifespan significantly longer than any other filter on the market
- Does not remove minerals which may be beneficial to health

BGX-4900 SERIES

| MODEL | PART # | MICRON | CLAIMS | FLOW RATE GPM | CAPACITY GAL | CASE QTY | |
|-------------|--------|--------|--|---------------|--------------|----------|---|
| BGX-4923X | 105280 | 0.2 | Cyst, Turbidity, Sediment, Chlorine Taste and Odor | 5.0 | 75,000 | 4 |  |
| BGX-4923P | 105281 | 0.2 | Scale, Cyst, Turbidity, Sediment, Chlorine Taste and Odor | 5.0 | 75,000 | 4 |  |
| BGX-4923XHC | 105295 | 0.2 | Cyst, Chloramine, Chlorine Taste and Odor | 7.5 | 265,000 | 4 |  |
| BGX-4923PHC | 105297 | 0.2 | Cyst, Sediment, Scale, Chlorine Taste and Odor | 7.5 | 265,000 | 4 |  |
| BGX-4925X | 105282 | 5.0 | Chlorine Taste and Odor | 5.0 | 75,000 | 4 |  |
| BGX-4925P | 105283 | 5.0 | Scale, Chlorine Taste and Odor | 5.0 | 75,000 | 4 |  |
| BGX-4925XHC | 105298 | 5.0 | Chlorine Taste and Odor | 7.5 | 265,000 | 4 |  |
| BGX-4925PHC | 105299 | 5.0 | Scale, Chlorine Taste and Odor | 7.5 | 265,000 | 4 |  |
| BGX-4933X | 105284 | 0.2 | Cyst, Turbidity, Sediment, Chloramine, Chlorine Taste and Odor | 3.5 | 60,000 | 4 |  |
| BGX-4933P | 105285 | 0.2 | Scale, Cyst, Turbidity, Sediment, Chlorine Taste and Odor | 3.5 | 60,000 | 4 |  |
| BGX-4916X | 105290 | 10.0 | Sand, Silt, Sediment, Rust | 15.0 | 150,000 | 4 |  |
| BGX-4916P | 105291 | 10.0 | Scale, Sand, Silt, Sediment, Rust | 15.0 | 150,000 | 4 |  |
| BGX-4900P | 105292 | 10.0 | Scale | 15.0 | 150,000 | 4 |  |
| BGX-4900N | 105288 | 10.0 | Softening | 3.0 | 4,500 gpg | 4 |  |
| BGX-4900W | 105289 | 10.0 | Softening | 3.0 | 3,000 gpg | 4 |  |

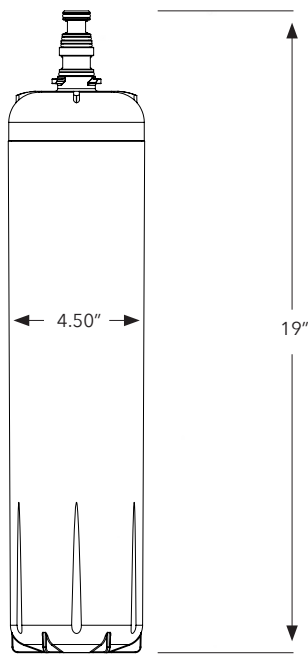

SPECIFICATIONS

| | |
|------------------------------|-------------|
| Dimensions | 4.50" x 19" |
| Operating Pressure | 25-125 psi |
| Operating Temperature | 35°-100°F |

WARRANTY

Aquamor warrants water treatment systems will be free from defects in material and manufacture for five (5) years from the date of purchase. Replacement filter cartridges and elements are warranted to be free from defects in material and manufacture for one (1) year from the date of purchase. This warranty does not cover any failures resulting from abuse, misuse, alteration, or damage not caused by Aquamor or failure to follow proper installation and use instructions. If the product fails to satisfy this limited warranty during the described period, Aquamor will replace or refund the purchase price of the product. This warranty does not cover additional costs such as labor. Refer to product Installation and Operating Instruction Manual for additional information and complete warranty information.