


BGM-P04

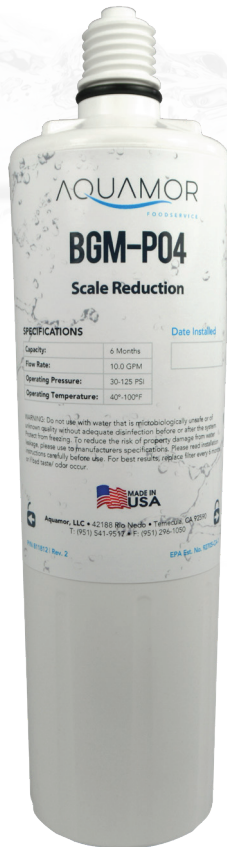

ADVANCED FILTRATION TECHNOLOGY

Engineered to preserve appliances, the Aquamor Foodservice BGM-P04 protects plumbing fixtures and pipes from corrosion by decreasing scale build-up. Made with the best available materials such as quality carbons, specially selected plastics and proprietary media, the scale inhibitor is an unparalleled premium solution for scale control. Through the use of its features, the BGM-P04 offers superior results with its long life and increased capacity.

REPLACES

- AP431

USE WITH AQUAMOR PART NUMBER

- 105498
SCALE PRO.X Tee Fitting

FEATURES


- 100% Factory Leak Tested
- Assembled in the USA
- High-quality O-ring seal
- Best used for the reduction/removal of scale
- Ideal for residential and small commercial applications

SPECIFICATIONS

Operating Pressure:	30-125 PSI
Operating Temperature:	40°F-100°F
Flow Rate:	10 gpm
Cartridge Life:	Up to 80,000 gal (300,000+ Liters)

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before and/or after the system.

BGM-P04

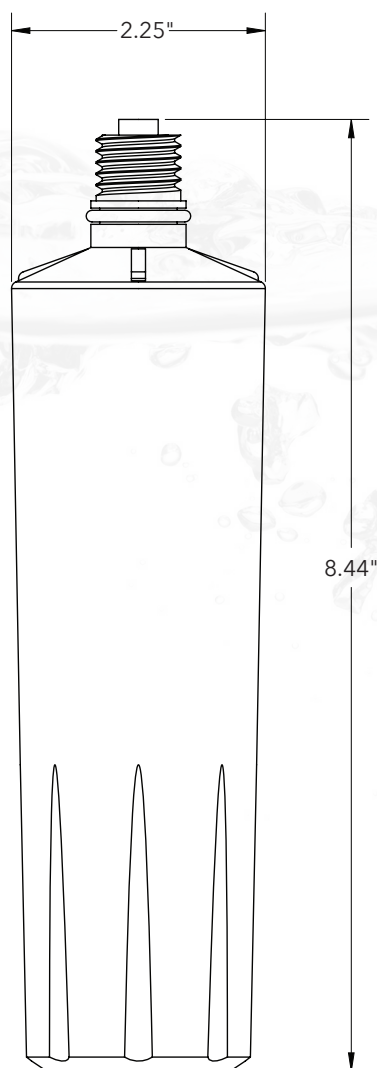

WARRANTY

Aquamor warrants water treatment systems will be free from defects in material and manufacture for five (5) years from the date of purchase. Replacement filter cartridges and elements are warranted to be free from defects in material and manufacture for one (1) year from the date of purchase. This warranty does not cover any failures resulting from abuse, misuse, alteration, or damage not caused by Aquamor or failure to follow proper installation and use instructions. If the product fails to satisfy this limited warranty during the described period, Aquamor will replace or refund the purchase price of the product. This warranty does not cover additional costs such as labor. Refer to product Installation and Operating Instruction Manual for additional information and complete warranty information.

WARNING: To reduce the risk of property damage due to water leakage, this filter MUST be installed in accordance with the manufacturers specifications and instructions. This filter unit must be replaced every 6 months, at the rated capacity, or sooner if reduced water flow occurs. Protect from freezing. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product. Protect from freezing.